

Kelin Waterborne 环氧地坪漆 是一种环保、耐用的地坪材料。它具有良好的耐磨性、防滑性和易清洁性。适用于各种室内地面，如办公室、学校、医院、工厂等。其施工简便，干燥速度快，且无异味，对人体无害。是一种理想的室内地坪解决方案。

环氧地坪漆 是一种由 [M. anufacturer](#) 生产的。它具有优异的机械性能、化学稳定性和电绝缘性。广泛应用于工业、商业和民用建筑的地面装饰和保护。其使用寿命长，维护成本低。是一种高性能的地坪材料。 - [环氧地坪漆](#) 环氧。



环氧地坪漆 是一种环保、耐用的地坪材料。它具有良好的耐磨性、防滑性和易清洁性。适用于各种室内地面，如办公室、学校、医院、工厂等。其施工简便，干燥速度快，且无异味，对人体无害。是一种理想的室内地坪解决方案。

- Gray 1#
- Gray 2#
- Gray 3#
- Gray 4#
- Gray 5#
- Gray 6#
- Gray 7#
- Gray 8#
- Gray 9#
- Cement Gray
- Dull Gray
- Silver Gray
- Metal Gray
- Luxury Silver
- Glacier White
- Calaeatta
- Pearl Gold
- Slate Gray
- Terra Brown
- Greyish Green
- Yellow Gray
- Soft Khaki
- Yellowish Brown
- Olive Brown
- Brownness
- Dark Brown
- Reddish Brown
- Rock Bslack



□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □





01 Clean the tiles and keep it dry



02 Polish with tile wax except the glazed tile



03 Open & Watch, both sides can extruded meanwhile



04 Screw on the nozzle, put on the grout gun



05 Inclined cut the top of the nozzle in 45°



06 Squeeze out 60-80cm long grout in the forepart



07 Evenly squeeze out the tile agent along the gap



08 Press the grout with professional glue-press tools



09 Don't touch in 4-5 hours and remove excess grout then.



10 Keep the tiles dry in 24 hours

□□ □□ □□ □□



01 Cutter Knife



02 Pointing trowel



03 Brush



04 Rainbow Scraper



05 Stirring Knife




06 The sponge



07 Scouring Pad

□□ □□

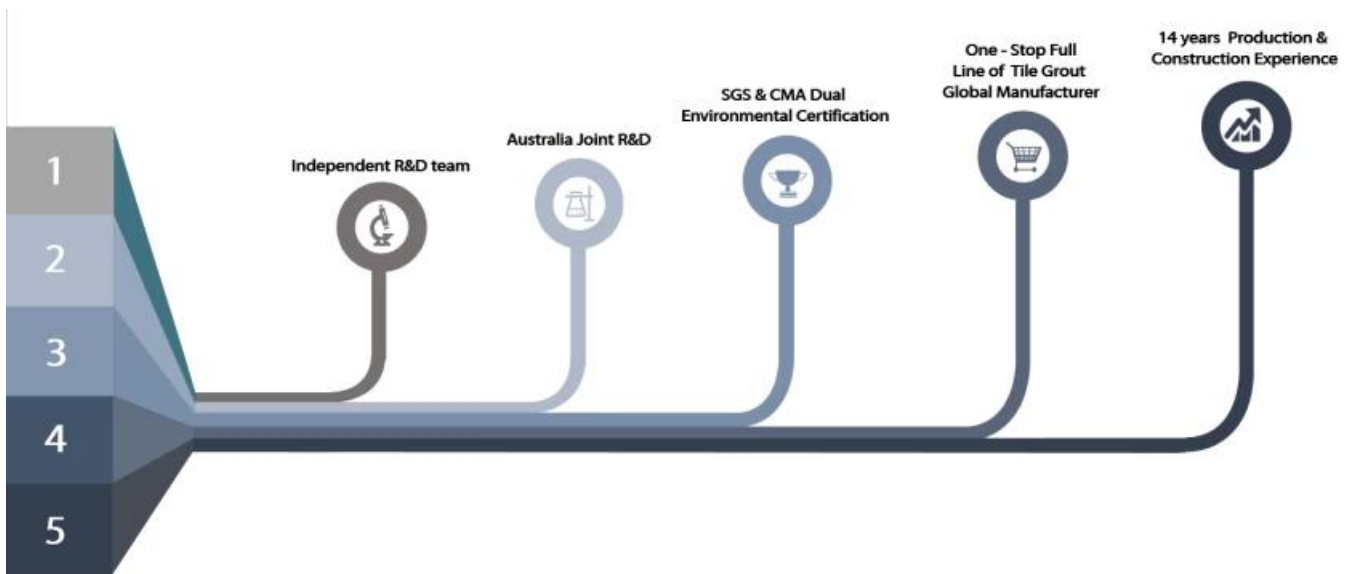

□□ □□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□

