


Kelin Epoxy 係 一種 高品質 之 建築 材料。 此種 材料 具有 極佳 之 粘結 力， 且 能 提供 持久 之 保護。 其 應用 範圍 極廣， 包括 室內 外 牆面 之 修補 及 裝飾。 此外， 此種 材料 亦 具有 良好 之 耐污 及 耐刮 性能， 故 常被 用於 商業 場所 及 工業 環境。 總之， Kelin Epoxy 係 一種 極佳 之 建築 材料， 能 為 您的 建築 項目 提供 最佳 之 解決方案。

此種 材料 之 優點 包括： 1. 粘結 力 強。 2. 耐污 及 耐刮。 3. 易於 清潔 及 維護。 4. 顏色 多樣 且 持久。 5. 適用 於 各種 表面。 6. 環保 且 無毒。 7. 施工 簡便。 8. 價格 合理。 9. 壽命 長。 10. 專業 服務。 [請 洽 專業 人士](#) 以 獲得 更多 資訊。



請 洽 專業 人士 以 獲得 更多 資訊。

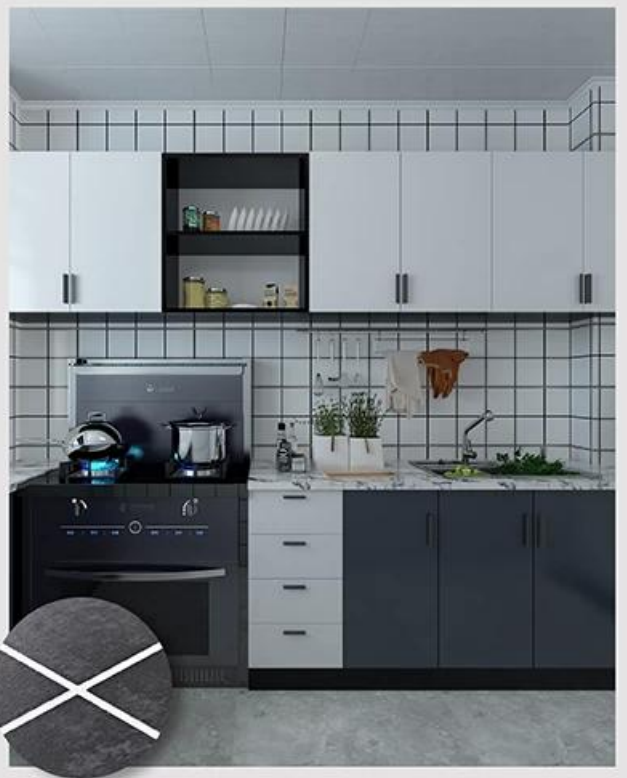

□ □ □ □ □ □ □ □ □ □ □ □





01 Clean the tiles and keep it dry



02 Polish with tile wax except the glazed tile



03 Open & Watch, both sides can extruded meanwhile



04 Screw on the nozzle, put on the grout gun



05 Inclined cut the top of the nozzle in 45°



06 Squeeze out 60-80cm long grout in the forepart



07 Evenly squeeze out the tile agent along the gap



08 Press the grout with professional glue-press tools



09 Don't touch in 4-5 hours and remove excess grout then.



10 Keep the tiles dry in 24 hours

□□ □□ □□ □□



Two Component Caulking Gun



02 Cutter Knife



03 Pointing trowel



04 Brush



05 Forming Stick



06 Pointing Knife



07 Masking Tape



08 Stainless Steel Ball



09 Cleaning Awl

□□ □□



□□ □□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□

