

Kelin Epoxy 係 一種 極佳 之 填補 劑 及 密封 劑。 此 填補 劑 係 由 特殊 之 化學 成分 所 製成， 具有 極高 之 黏性 及 硬化 後 之 堅固 度。 此 填補 劑 可 應用 於 各種 不同 之 表面， 如 瓷磚 之 縫隙、 牆面 之 裂縫、 樓梯 之 邊緣、 浴室 之 邊緣、 廚房 之 檯面、 以及 各種 不同 之 牆面 及 天花 等。 此 填補 劑 之 優點 在於 其 極佳 之 黏性 及 硬化 後 之 堅固 度， 且 其 顏色 可 與 原有 之 表面 顏色 相 配， 使 填補 後 之 表面 看起來 更 為 自然 及 美觀。 此 填補 劑 之 應用 範圍 極 廣， 且 其 價格 亦 相 對 低廉， 實 為 建築 界 之 理想 選擇。



此 填補 劑 係 由 特殊 之 化學 成分 所 製成。

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness


Dark Brown

Reddish Brown

Rock Bslack



□ □ □ □ □ □ □ □ □ □

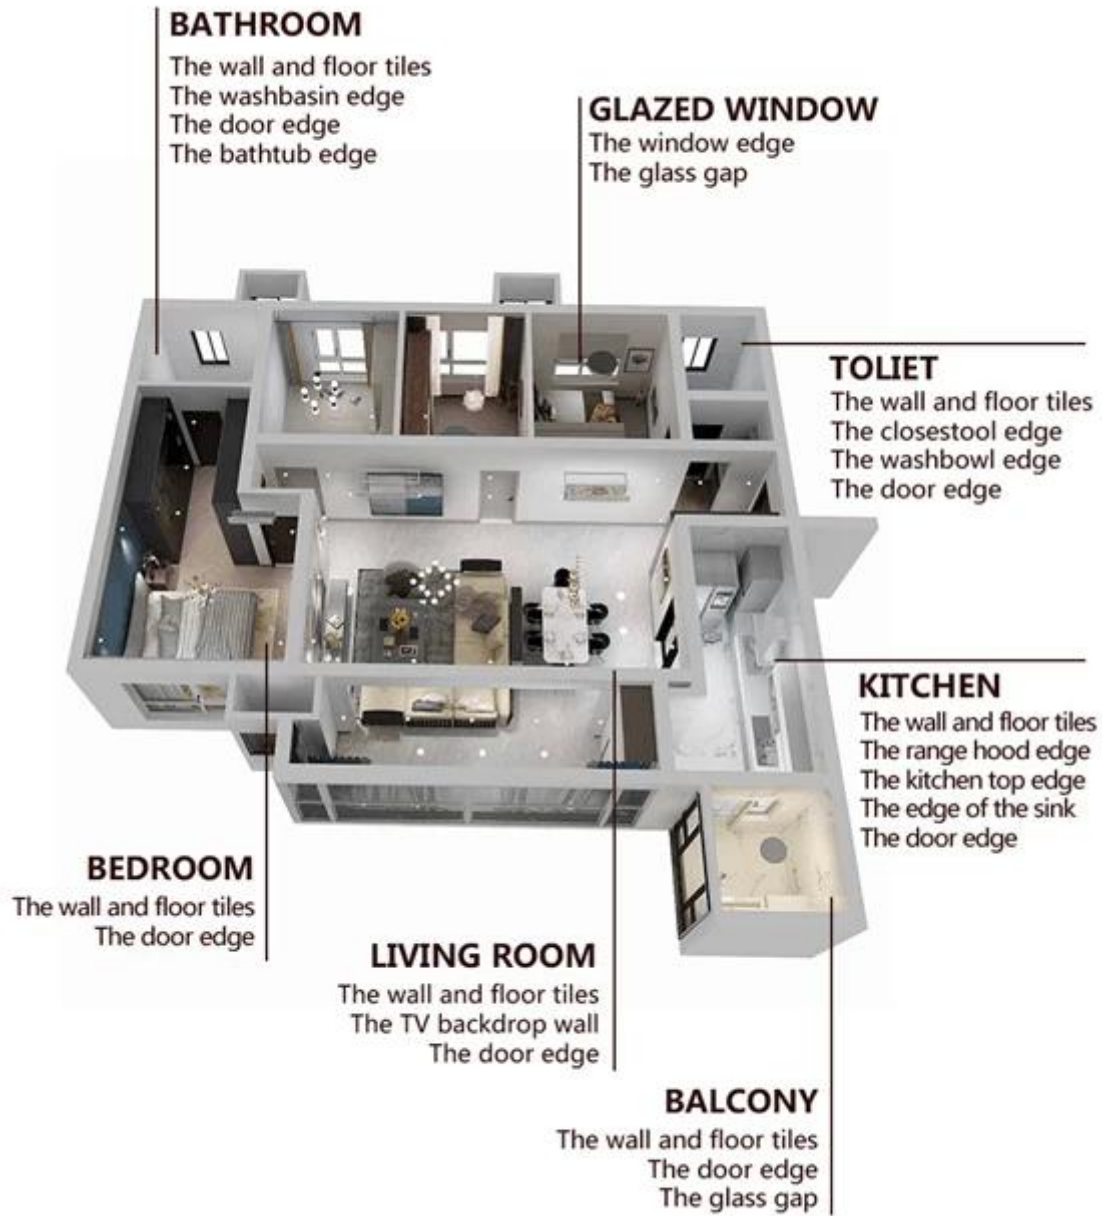



01  
Clean the tiles and keep it dry



02  
Polish with tile wax except the glazed tile



03  
Open & Watch, both sides can extruded meanwhile



04  
Screw on the nozzle, put on the grout gun



05  
Inclined cut the top of the nozzle in 45°



06  
Squeeze out 60-80cm long grout in the forepart



07  
Evenly squeeze out the tile agent along the gap



08  
Press the grout with professional glue-press tools



09  
Don't touch in 4-5 hours and remove excess grout then.



10  
Keep the tiles dry in 24 hours

□□ □□ □□ □□



Two Component Caulking Gun



Cutter Knife

Pointing trowel

Brush

Forming Stick

Perching Knife

Masking Tape

Stainless Steel Ball

Cleaning Awl

□□ □□



□□ □□



□□ □□ □□



□□□ □□□



□□ □□ □□



□□ □□□



□□ □□ □□



□□ □□ □□



□□ □□ □□



□□ □□ □□

□□

