


Kelin 係 一種 高 級 之 環 氧 樹 脂 塗 料。POLYUREA 係 一種 高 級 之 環 氧 樹 脂 塗 料， 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成， 係 一 種 高 級 之 環 氧 樹 脂 塗 料。 此 種 塗 料 係 由 polyure 所 組 成， 係 一 種 高 級 之 環 氧 樹 脂 塗 料， 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。 此 種 塗 料 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。 此 種 塗 料 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。 此 種 塗 料 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。 此 種 塗 料 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。 Kelin [www.kelin.com](#) 係 一 種 高 級 之 環 氧 樹 脂 塗 料。



此 種 塗 料 係 由 環 氧 樹 脂 及 異 氰 酸 基 預 聚 體 所 組 成。

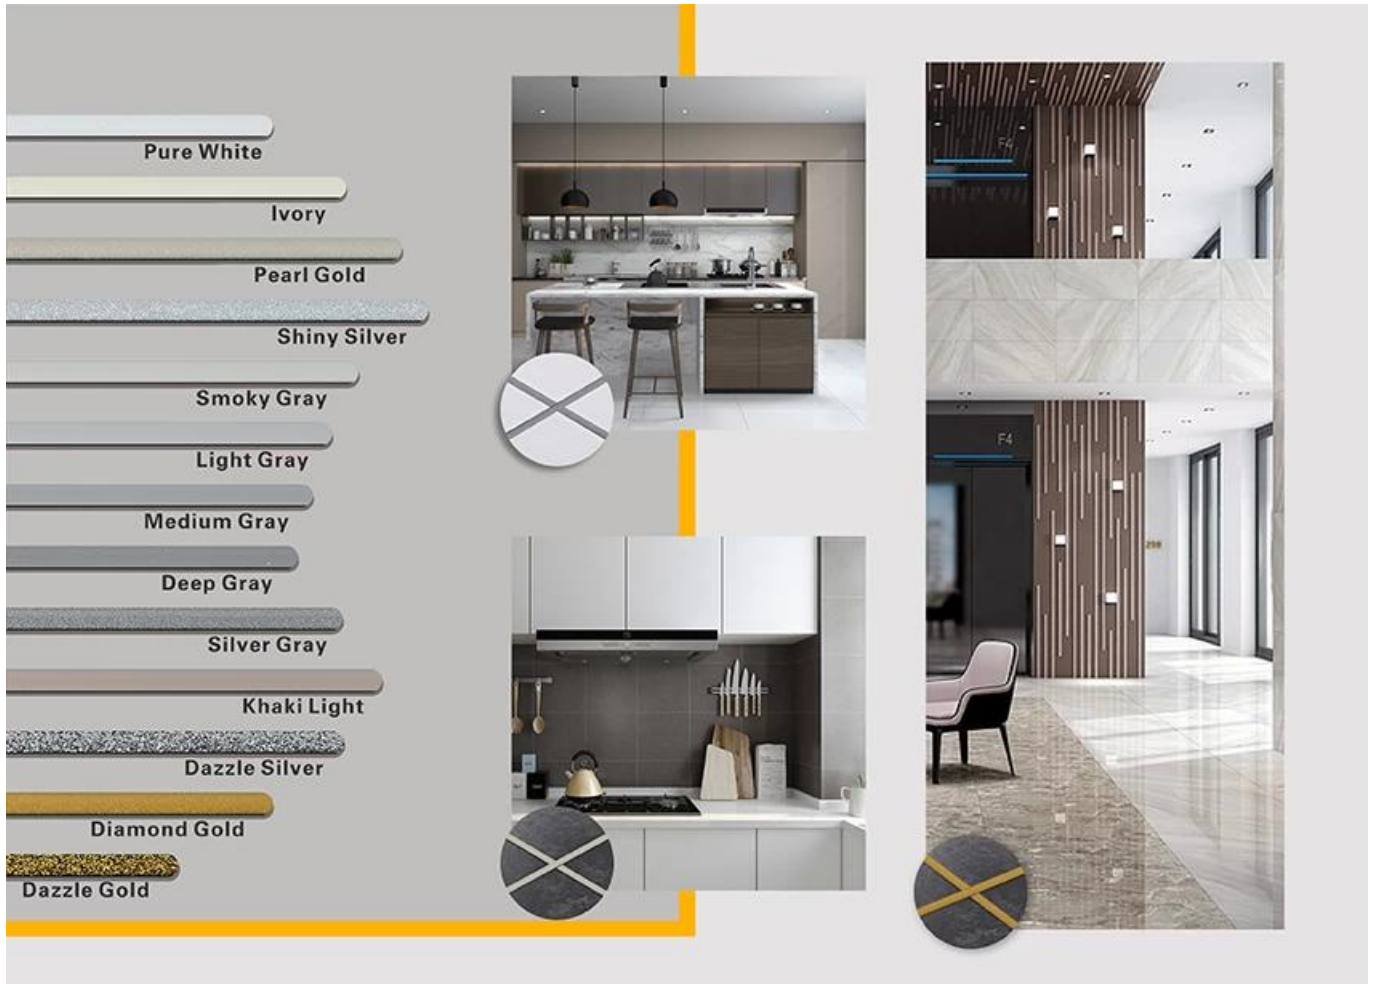

Polyurea □ □ □ □ □ □

ENVIRONMENTAL (construction solid about 80-100%)

CONVENIENT CONSTRUCTION
(traditional construction method)

WATER PROOF (0.6mm Polyurea=2mm Polyurethane)

**3rd GENERATION
POLYUREA BASIC**

WEATHER RESISTANCE (qvb2000h)

ENERGY CONSERVATION
(-5°Csolidify , primary film formation is 375um)

WEAR RESISTANCE (750g/500 times abrasion loss 30mg)
CORROSION RESISTANCE (salt fog resistance for 2000h)

□ □ □ □ □ □





01

Clean the tiles and keep it dry




02

Polish with tile wax except the glazed tile



03

Open & Watch, both sides can extruded meanwhile



04

Screw on the nozzle, put on the grout gun




05

Inclined cut the top of the nozzle in 45°



06

Squeeze out 60-80cm long grout in the forepart



07

Evenly squeeze out the tile agent along the gap




08

Press the grout with professional glue-press tools



09

Don't touch in 2-4 hours and remove excess grout then.



10

Keep the tiles dry in 24 hours

□□ □□ □□ □□



01

Two Component Caulking Gun



02



03



04



05



06



07



08



09

Cutter Knife

Pointing trowel

Brush

Forming Stick

Perching Knife

Masking Tape

Stainless Steel Ball

Cleaning Awl

□□ □□



□□ □□



□□ □□ □□



□□□



□□ □□ □□



□□ □□□



□□ □□ □□



□□ □□□



□□ □□ □□



□□

□□

