

Kelin Waterborne ၀၀၀ ၀၀၀၀ ၀၀ ၀၀ ၀၀ ၀၀၀၀၀. ၀၀၀ ၀၀၀ ၀၀၀ ၀၀၀ ၀ ၀၀၀ ၀၀ ၀၀ ၀၀ ၀၀ ၀၀၀၀၀. ၀၀ ၀၀၀၀ ၀၀၀၀ ၀၀ ၀၀ ၀၀ ၀၀ ၀၀၀၀ ၀၀၀၀, ၀၀၀ ၀၀၀ ၀၀၀ ၀၀၀ ၀၀၀၀ ၀၀၀၀. ၀၀၀ ၀၀, ၀၀၀ ၀၀၀၀၀၀၀ ၀ ၀၀၀၀၀၀၀. ၀ ၀၀ ၀၀၀ ၀၀၀ ၀၀၀ ၀ ၀၀ ၀၀၀ ၀၀၀၀၀ ၀၀၀၀၀၀. ၀၀၀၀ ၀၀ ၀ ၀၀ ၀၀၀ ၀၀၀၀၀ ၀၀၀၀၀ ၀၀၀၀ ၀၀၀ ၀၀ ၀၀၀၀ ၀၀၀၀.

၀၀၀ ၀၀ ၀၀ ၀၀၀၀ ၀ ၀၀ **M. anufacturer.** ၀၀၀ ၀၀, ၀, ၀၀, ၀၀၀ ၀၀၀၀ ၀၀ ၀၀ ၀၀, ၀၀, ၀၀ ၀၀ ၀၀၀၀ ၀၀၀ ၀၀၀ ၀ ၀ ၀၀ ၀ ၀ ၀၀၀၀. ၀၀ ၀၀၀ ၀၀ ၀၀၀၀, ၀၀၀ ၀၀၀၀၀၀၀ ၀၀ ၀၀ ၀၀၀ ၀၀၀၀၀. ၀၀ ၀၀ ၀၀ ၀ ၀၀ ၀၀၀ ၀ ၀၀ ၀၀၀ ၀၀၀၀ ၀၀၀ ၀၀ ၀၀၀၀ ၀ ၀၀ ၀၀၀ ၀၀ ၀၀ ၀၀၀ ၀၀ ၀၀ ၀၀၀ ၀၀၀၀၀ ၀၀၀၀. ၀၀၀၀ ၀၀ ၀၀ ၀၀၀၀၀ - [၀၀.၀၀.၀၀၀.၀၀၀](#) ၀၀.



၀၀၀ ၀၀၀၀ ၀၀၀ ၀၀. ၀၀ ၀၀၀ ၀၀ ၀၀၀ ၀၀၀၀၀.





01 Clean the tiles and keep it dry



02 Polish with tile wax except the glazed tile



03 Open & Watch, both sides can extruded meanwhile



04 Screw on the nozzle, put on the grout gun



05 Inclined cut the top of the nozzle in 45°



06 Squeeze out 60-80cm long grout in the forefront



07 Evenly squeeze out the tile agent along the gap



08 Press the grout with professional glue-press tools



09 Don't touch in 4-5 hours and remove excess grout then.



10 Keep the tiles dry in 24 hours

□□ □□ □□ □□



01 Cutter Knife



02 Pointing trowel



03 Brush



04 Rainbow Scraper



05 Stirring Knife




06 The sponge



07 Scouring Pad

□□ □□

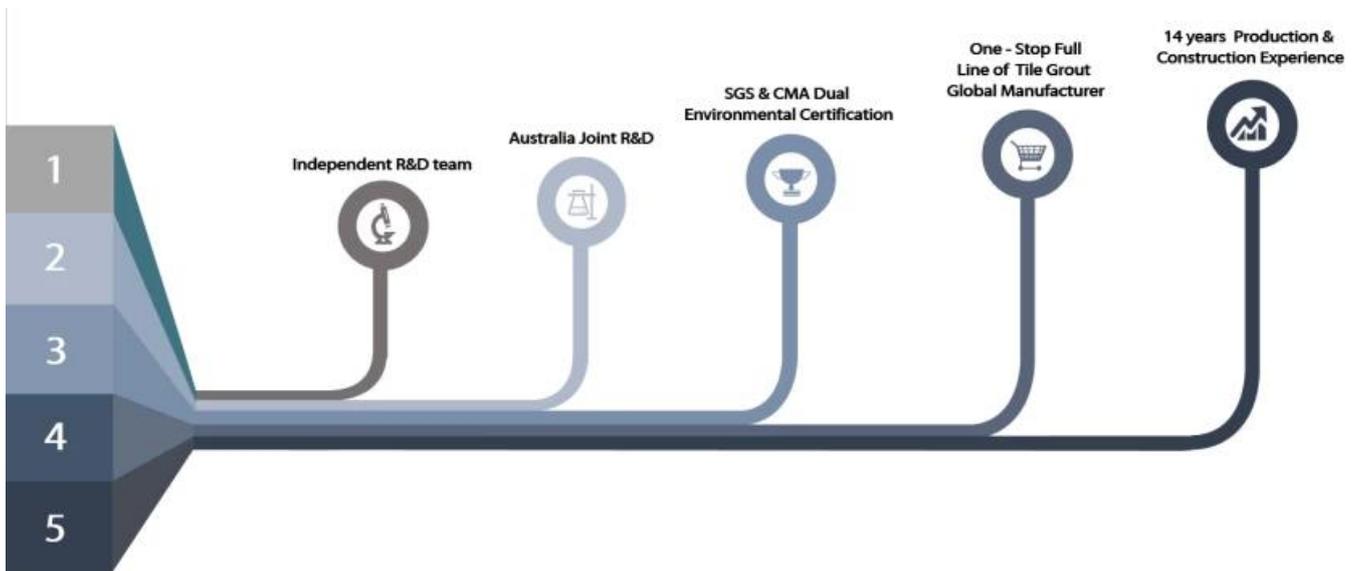

□□ □□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□

