Kelin 폴리 우레아 타일 그라우트는 새로운 전복 제품입니다. POLYUREA의 우수한 내마모성, 내식성, 내 황색 성, 고온 저항성 및 기타 우수한 성능으로 인해 군사 산업, 항공 우주 및 선박 산업에서 널리 사용됩니다. 우리의 제품은 완전히 polyure 기본 제품이며 벽에 세라믹 타일, 돌, 유리, 모자이크 타일 또는 실내 및 실외 밀가루의 관절에 더 잘 사용할 수 있습니다. 영구 방습, 더 환경, 빠른 경화, 노동력 절약 및 변색 방지라는 고유 한 특성이 가장 큰 장점입니다. 또한 같은 날에 신속하게 굳어지고 시공 및 깨끗한 가장자리가있어 시간과 인건비를 절약 할 수 있습니다. 더 중요한 것은 축축한 보조기 층 표면에 시공 할 수있어 기후 및 기타 이유로 시공 할 수없는 문제를 크게 해결합니다. 호주 공동 연구 개발 제품은 더 나은 성능을 만들고 중국 과학원의 전략적 품질 관리 지침을 통해 제품 품질을 안정적으로 만듭니다. 중국_폴리_우레아_타일_그라우트 제조_업체, 우리의 제품은 엄격한 품질 관리가 있습니다.

당신이 선택한 다양한 색상. 또한 사용자 정의 색상을 제공하십시오.

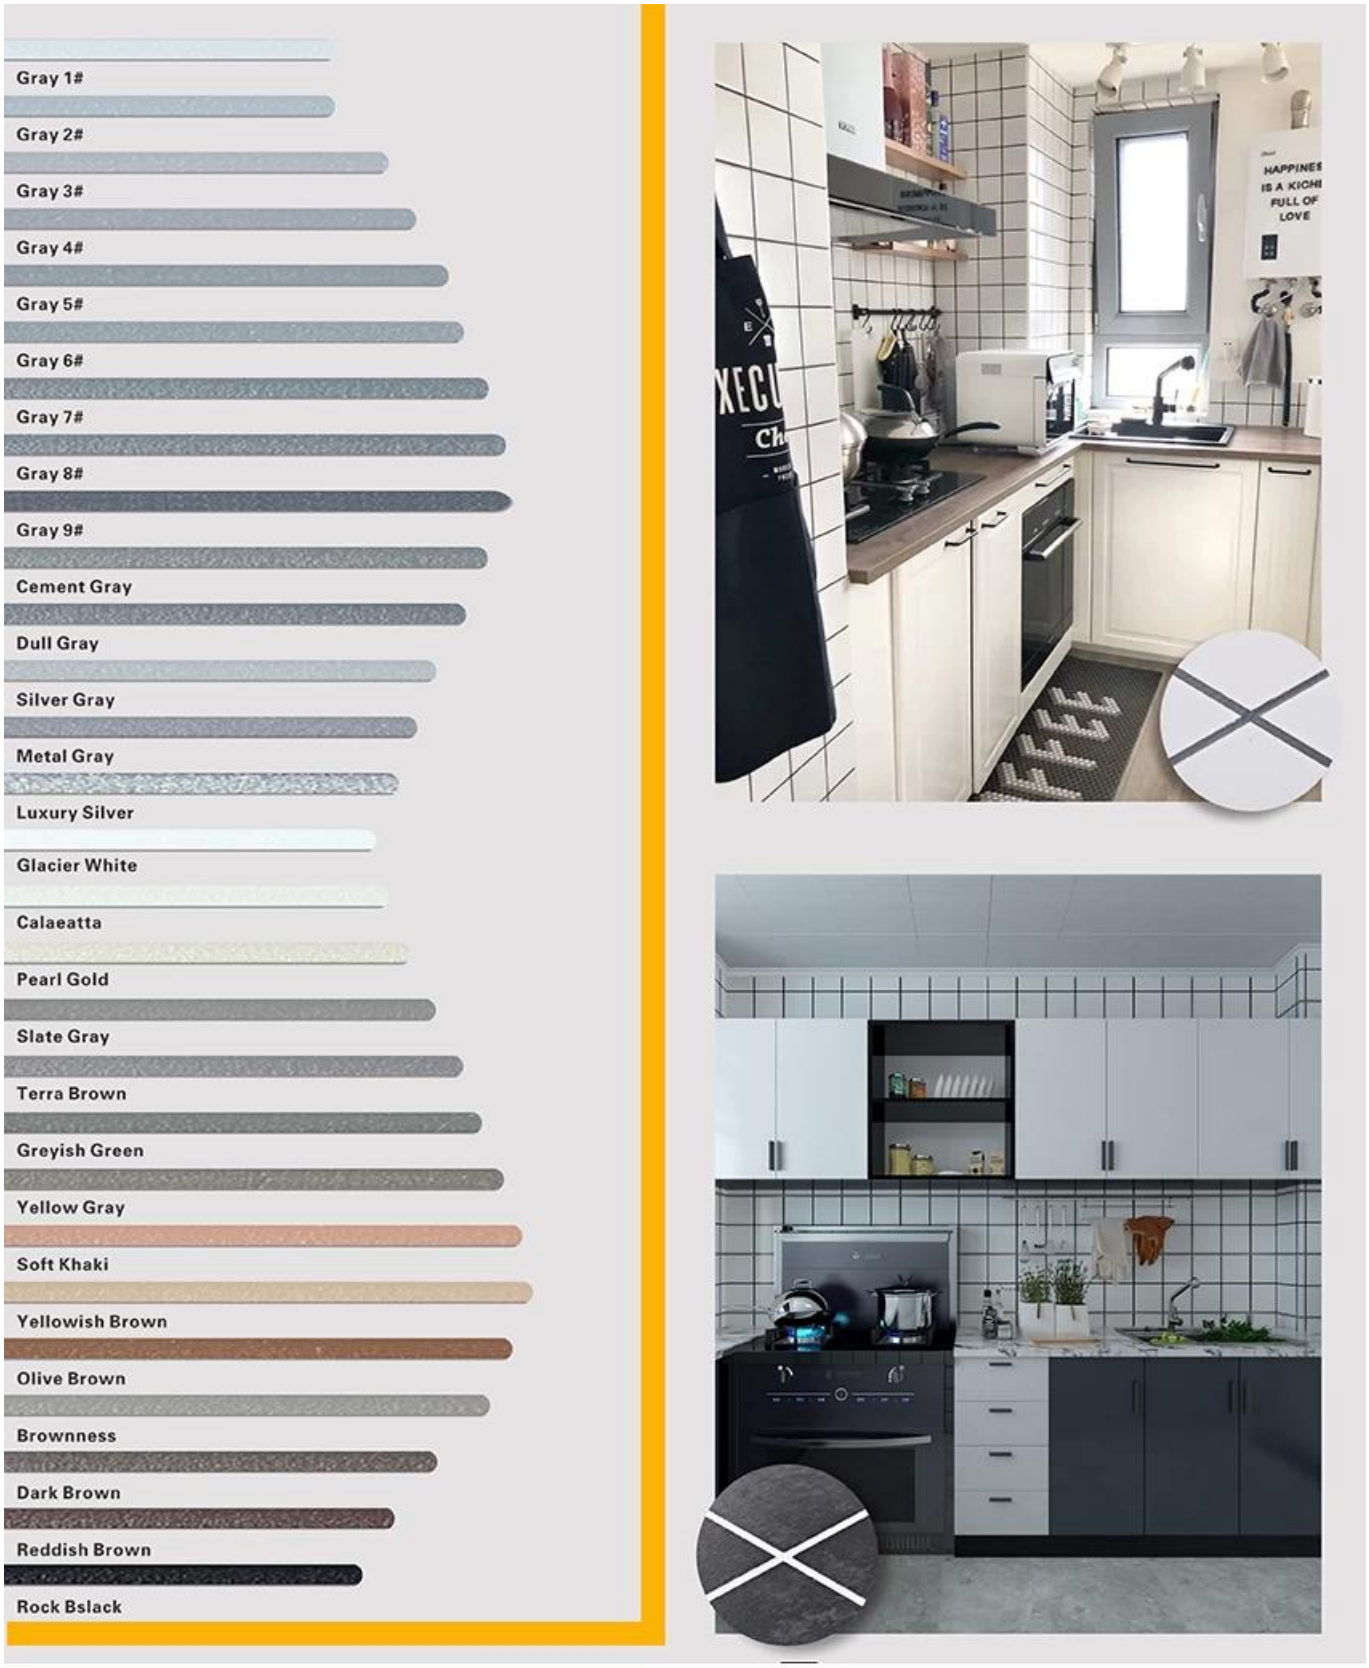

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack

Polyurea 기본 타일 그라우트 기능

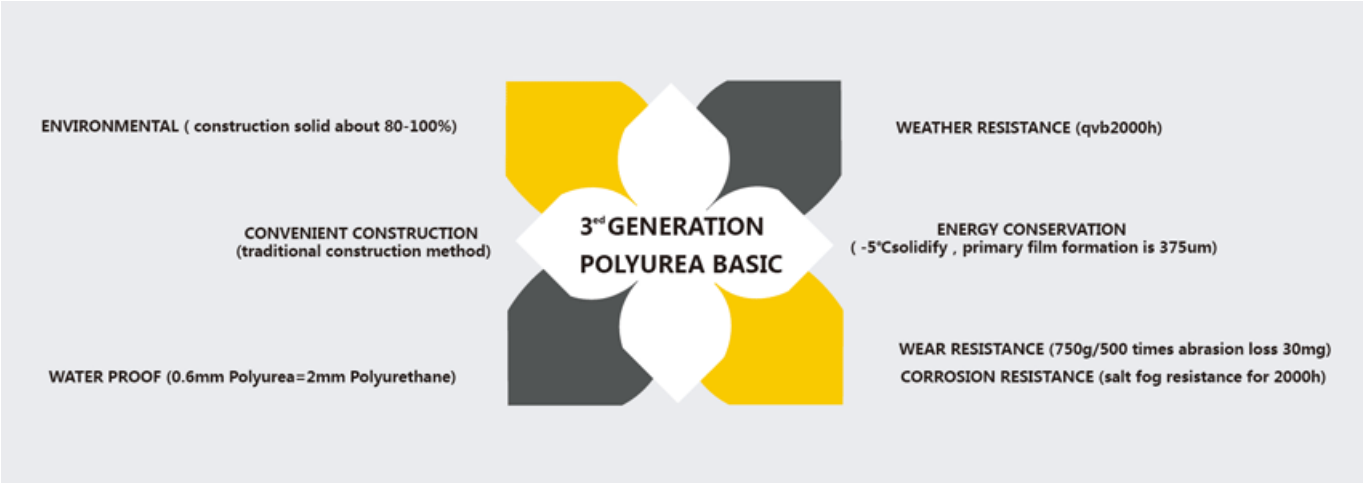
ENVIRONMENTAL (construction solid about 80-100%)
CONVENIENT CONSTRUCTION
(traditional construction method)
WATER PROOF (0.6mm Polyurea=2mm Polyurethane)
3rd GENERATION
POLYUREA BASIC
WEATHER RESISTANCE (qvb2000h)
ENERGY CONSERVATION
(-5℃solidify , primary film formation is 375um)
WEAR RESISTANCE (750g/500 times abrasion loss 30mg)
CORROSION RESISTANCE (salt fog resistance for 2000h)

□□ □□ □ □□□ □□

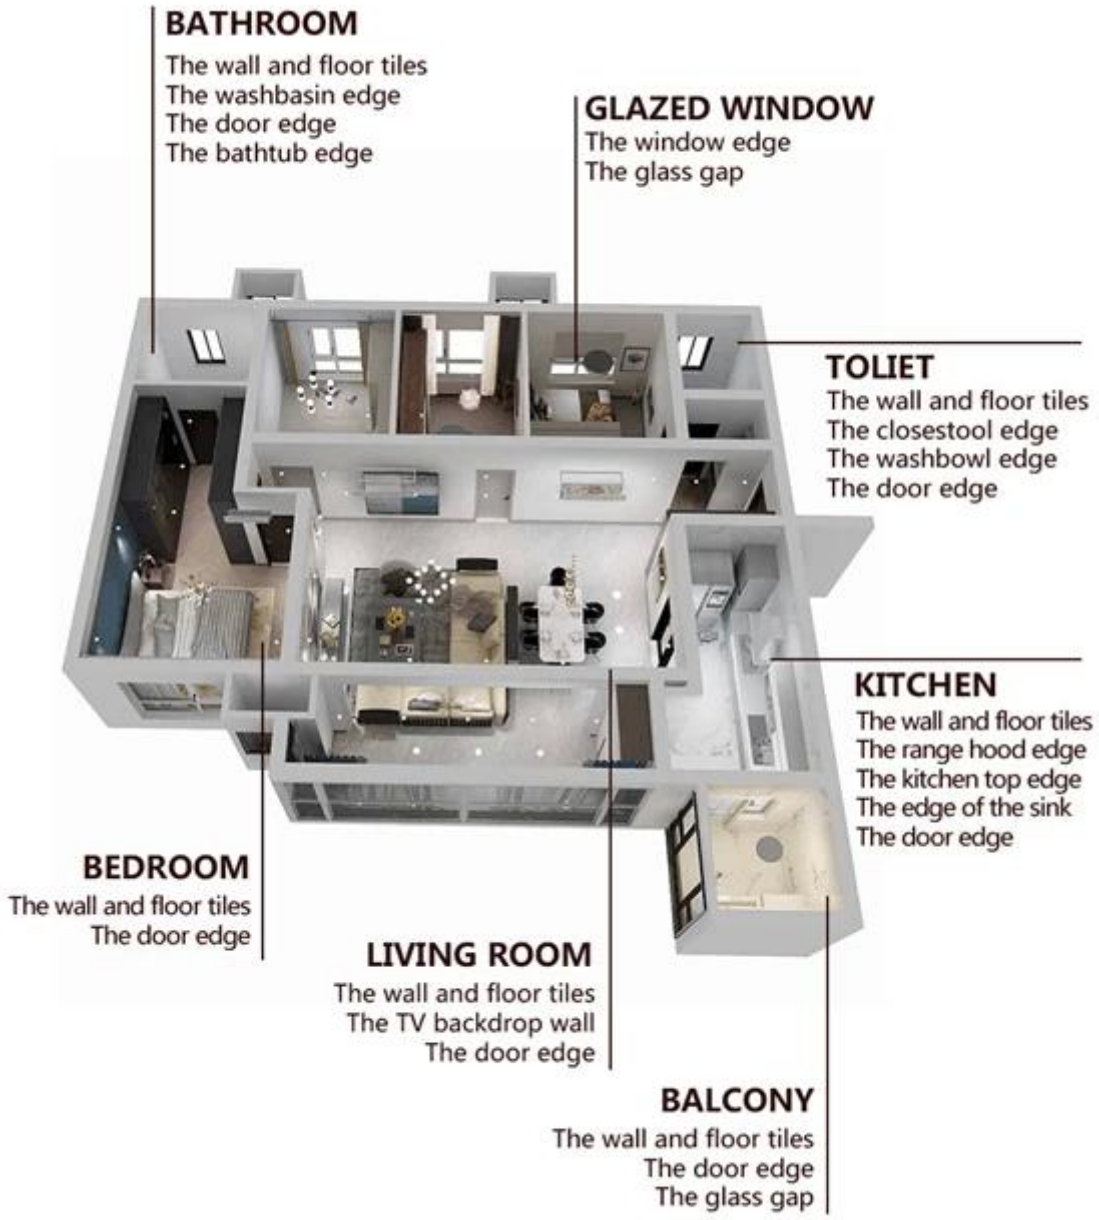
BATHROOM
The wall and floor tiles
The washbasin edge
The door edge
The bathtub edge
GLAZED WINDOW
The window edge
The glass gap
TOLIET
The wall and floor tiles
The closestool edge
The washbowl edge
The door edge
KITCHEN
The wall and floor tiles
The range hood edge
The kitchen top edge
The edge of the sink
The door edge
BEDROOM
The wall and floor tiles
The door edge
LIVING ROOM
The wall and floor tiles
The TV backdrop wall
The door edge
BALCONY
The wall and floor tiles
The door edge
The glass gap

□□□ □□ □□

01
Clean the tiles and keep it dry

02
Polish with tile wax except the glazed tile

03
CORING
Open & Watch, both sides can extruded meanwhile

04
Screw on the nozzle, put on the grout gun

05
Inclined cut the top of the nozzle in 45°

06
Squeeze out 60-80cm long grout in the forepart

07
Evenly squeeze out the tile agent along the gap

08
Press the grout with professional glue-press tools

09
Don't touch in 2-4 hours and remove excess grout then.

10
Keep the tiles dry in 24 hours

□□□□ □□□ □□□ □□